


1.1 Input Characteristics

AC input voltage rating	220Vac
AC input voltage range	200Vac – 240Vac
AC input frequency range	47Hz ~ 63Hz
Input current	2.20A Max.
Input Power	300W Max.
Power factor	0.6 Min
Efficiency	85% Min

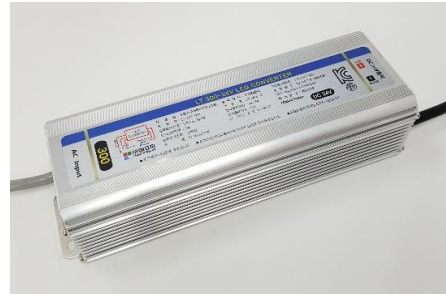

1.2 Output Characteristics

Output Voltage	24.0V
Rated load current	11.5A
Max load current	11.5A
Rated Output Power	276W
Min. load current	100mA
Output Tolerance	±5%
Ripple and Noise	1500mVp-p

1.3 Performance Specifications

Line Regulation	±5%
Load Regulation	±5%

1.4 Protection Features

Over Current Protection	Output shut down with auto-recovery
Short Circuit Protection	Output shut down with auto-recovery
Over Voltage or Load Protection	Output shut down with auto-recovery
Over Temperature Protection	Output shut down with auto-restart
Thermal Regulation Function	±10% Output Voltage

1.5 Environments

Operating Temperature	-20°C to +50°C
Storage Temperature	-30°C to +70°C
Operating Humidity	20% to 90% R.H.
Storage Humidity	0% to 95% R.H.

1.6 Dielectric Withstand Voltage (Hi-Pot)

condition : non operating	
Test Point : primary to secondary	3.0KVac, 10mA, 3Sec

1.7 Insulation Resistance

condition : non operating	
Test Point : primary to secondary	Greater than 100MΩ at 500 VDC

2 Performance Evaluation

This session presents the test results of SMPS module up to data. Results on inrush current and safety test are not included and will be added when they become available. Overall, the module meets design specifications.

2.1 Input Characteristics

2.1.1 Input current and Standby power

The module was tested at different input voltages (from 200Vac to 240Vac)

Standby power at min. load			
Input Voltage	200V/60Hz	220V/60Hz	240V/60Hz
Pin (mW)	3.0W	3.1W	3.7W
Input current at full load			
Input Voltage	200V/60Hz	220V/60Hz	240V/60Hz
Input Current (A)	2.40A	2.18A	2.10A
Efficiency			
Input Voltage	200V/60Hz	220V/60Hz	240V/60Hz
Input Power (W)	337.0W	335.0W	334.0W
Output Power (W)	272W	273W	273W
Power factor	0.67	0.67	0.67
Efficiency (%)	81%	82%	82%

2.2 Output Characteristics

2.2.1 Line Regulation & Load Regulation

Input Voltage	Output Voltage (V)		
	Min Load	Nor. Load	Max Load
200V/60Hz	24.30V	–	23.66V
220V/60Hz	24.30V	–	23.76V
240V/60Hz	24.30V	–	23.76V

2.2.2 Ripple & Noise

Ripple & Noise measure results

Input Voltage	Ripple & Noise (mV)		Remark
	Min Load	Max Load	
200V/60Hz	–	1100mV	
240V/60Hz	–	1000mV	


Note: Ripple & noise were measured at DC Cable end with a 0.1uF/50V ceramic cap connected in parallel with a 47uF/50V Electrolytic cap. Bandwidth was limited to 20MHz.

2.3 Protections


2.3.1 Over Current Protection (OCP)

The power supply will auto-recovery when output current exceeds up load 100%, and it should recover when the over current condition is removed.


3 load Characteristic Curve
Derating Curve

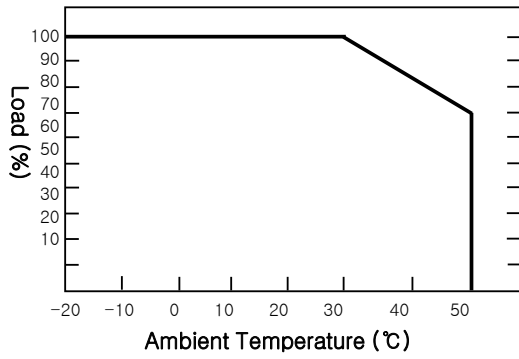

Startic Characteristic

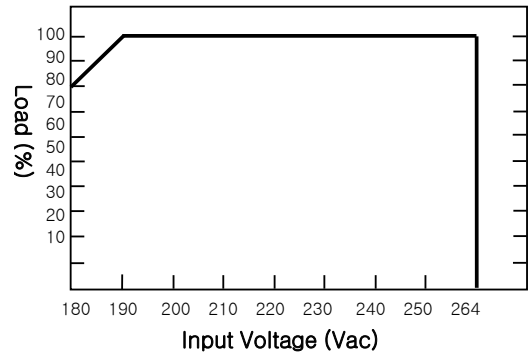

4 Block Diagram

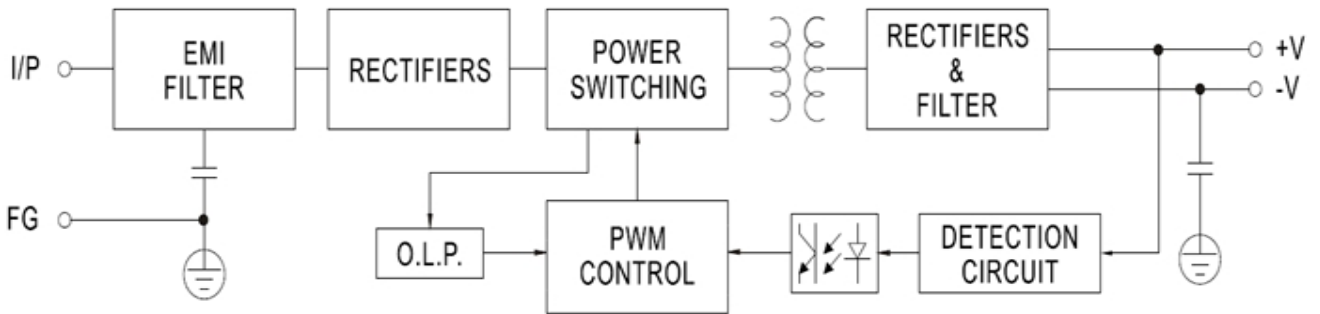

5 Case size

