

NSP160P



Constant Voltage Power Supplies

JH11728-24004

R-R-sP3-NSP160P

--- FEATURES ---

- High Efficiency 90%
- IP68 Waterproof
- OLP, SCP, OCP
- 20 to 50°C deg operation
- KC61347-1, -2-13 compliant

The constant voltage LED power supplies from Smart power can deliver up to **150W** of output power in an compact package size.

The Power Supply provide a range of output voltage solutions for specific LED requirements. With its high efficiency, Power Supply make you experience the high reliability and performance to maximum efficiency of industry as an outstanding solution.

Model Number	Input Voltage	Output Voltage	Output Current	Efficiency	Remark
NSP160P-36V	220Vac	36V	3.8A	91%	
NSP160P-24V	220Vac	24V	5.7A	91%	
NSP160P-12V	220Vac	12V	11.4A	91%	

Input Specifications

parameter	Conditions/Description	Min	Nom	Max	Units	Remark
Input Voltage Range	220Vac Input	200	220	240	Vac	
Input Frequency Range		47	60	63	Hz	
Input Current	220Vac in, 150W Input	1.40	1.4	1.40	A	
Power Factor	220Vac in, 150W Input	≥0.50				
Inrush Current	at 240Vac input, 25°C Cold start			30	A	



Output Specifications

parameter	Conditions/Description	Min	Nom	Max	Units	Remark
Line Regulation				±1	%	
Load Regulation				±2	%	
Voltage Accuracy	% of Vout			±2	%	
Ripple and Noise	20MHz Bandwidth			2	V	
Turn-on Delay	Measured at 220VAC and full load			3	s	
Short Circuit Protection	Auto Recovery					


General Specifications

parameter	Conditions/Description	Min	Nom	Max	Units	Remark
Isolation Voltage	Input to Chassis	1500			Vac	
Efficiency	See individual models	88		93	%	
No load Power Dissipation	Measured at 190VAC and 220VAC			4.0	W	
Lifetime	Load 80% at 25°C		30000		Hours	
Weight			±198		g	
Operating Temperature		-20		+50	°C	
Storage Temperature		-40		+90	°C	
Relative Humidity	Non-condensing (operating)	10		90	%RH	
Power Derating	At 210VAC, derates linearly from 100% at 25°C to 70% at 50°C					
	At 240VAC, derates linearly from 100% at 25°C to 70% at 50°C					

load Characteristic Curve

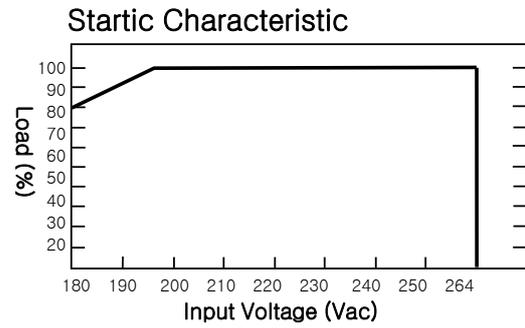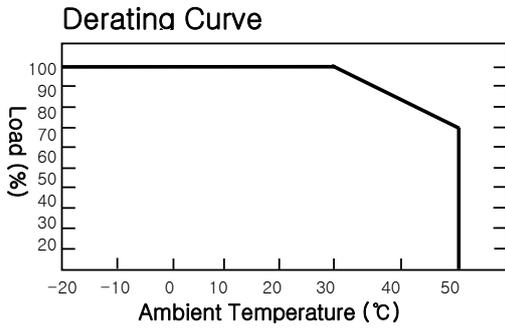

Block Diagram

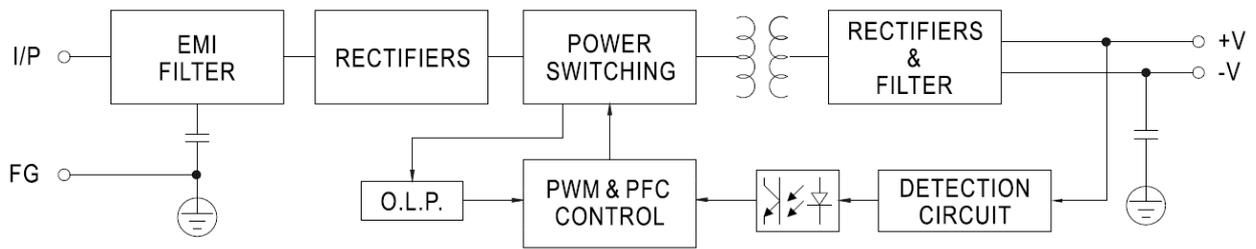

Case size

